
ANPING LINKLAND

WIRE MESH PRODUCT CO., LTD





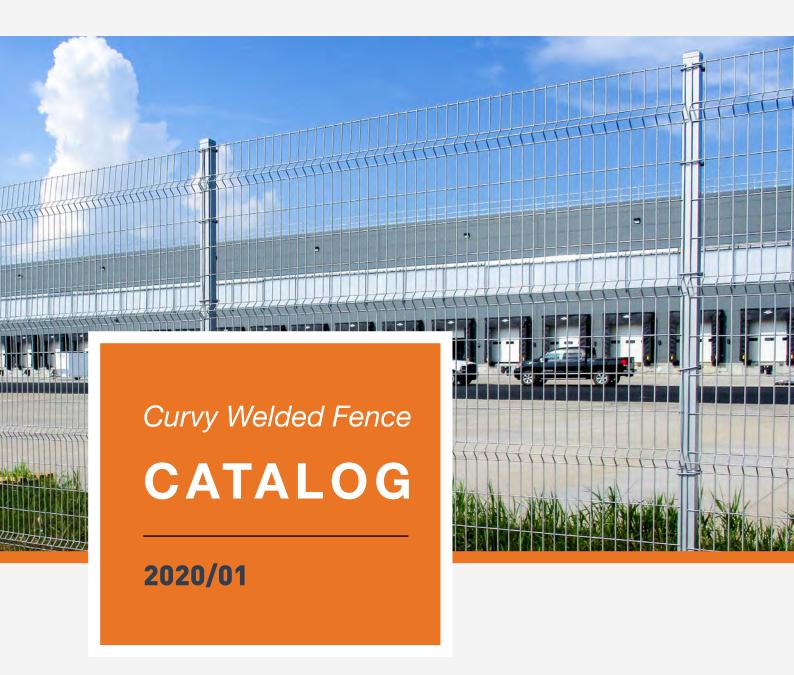

Tel: 0086 311 88833097 Mob: 0086 180 3291 2353



WhatsApp: 0086 180 3291 2353 Skype: 0086 180 3291 2353



www.linklanden.com Veronica@linklandfence.com



Curvy Welded Fence

Curvy welded fence, also known as 3D security fence, is a kind of specially designed welded wire mesh with V-shaped bending curves in its longitudinal direction.

It is made of high quality carbon steel wires where wires in the horizontal and vertical direction are welded at their junctions to provide a rigid wire mesh fence.


Generally, the number of V-shaped curves varies as the height of welded wire mesh varies.

Its attractive appearance, rigid structure and excellent visibility make it become a popular security fence that is widely used in railways, airports, schools, factories, residential areas, gardens, parks, sports stadiums, etc.

Surface Treatment



Specification

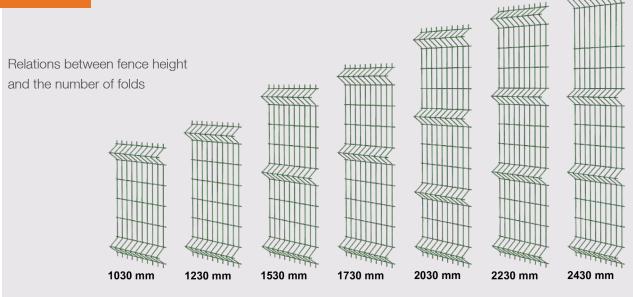

A Height:

630 mm, 830 mm, 1030 mm, 1230 mm, 1430 mm, 1530 mm, 1630 mm, 1730 mm, 1830 mm, 1930 mm, 2030 mm, 2230 mm, 2430 mm

B Width: 2000 mm, 2500 mm, 2900 mm

Wire Diameter: 3.0 mm, 3.5 mm, 4.0 mm, 4.5 mm, 5.0 mm

Mesh Opening:

 50×100 mm, 50×150 mm, 50×200 mm, 75×100 mm, etc.

E Clamp:


metal clamp/anti-UV plastic clamp/ no clamp (for peach post)

F Post:

Round post (48 0D \times 1.5/2.0 mm, 60 0D \times 1.5/2.0 mm); square post (50 \times 50 \times 1.5/2.0 mm, 60 \times 60 \times 1.5/2.0 mm, 80 \times 80 \times 1.5/2.0 mm);

rectangular post ($40 \times 60 \times 1.5/2.0$ mm, $40 \times 80 \times 1.5/2.0$ mm, $60 \times 80 \times 1.5/2.0$ mm, $80 \times 1.5/2.0$ mm)

G Post Cap: metal cap / anti-UV plastic cap

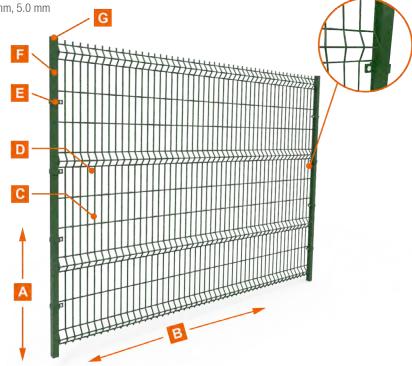

- All colors are available in Ral;
- >Other materials and specifications are available upon request.
- >If the fence height falls between 630 mm and 1430 mm, it will have 2 folds; if the fence height falls between 1530 mm and 1930 mm, it will have 3 folds; if the fence height falls between 2030 and 2430, it will have 4 folds as shown below.




The main components and connection methods of our curvy welded fence are as shown below.

Clamp bar connection





I post connection









J bolt connection



U bolt connection

Square clamp connection







Optional Accessories







Production Flow Chart

Step 1

Raw materials (carbon steel wires)

Step 2

Raw materials (carbon steel wires)

Step 3

Wire mesh welding

Step 4

Wire mesh bending


Step 5

Wire mesh powder coating

Step 6

Finished curvy welded fence panels (powder coating)



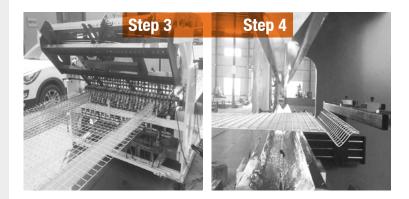



Package & Delivery







POST PACKAGE



FENCE DELIVERY



Features

Beautiful appearance

Its unique bending curves make it have an authentic 3D outlook compared with other fence panels.

Corrosion resistance & weatherproof performance

Its galvanized and powder coating surface give excellent rust & corrosion resistance to withstand various harsh environment conditions.

Application



OFFICE BUILDINGS



RESIDENTIAL COMMUNITIES

Ridge structure

Its bending curves not only offer a beautiful surface but also strengthen its rigidity.

Long service life

The galvanized and powder coating treatment allows the curvy welded fence working properly for 10 years.



KINDERGARTENS



FACTORY YARDS

Cost effective

It provides a competitive price while maintaining high quality, rigidity and long life service.

Less maintenance

It has a solid structure, so it will not damage easily. Besides, its excellent corrosion resistance and weatherproof performances keep it work properly under harsh environments and extend its maintenance period.

•••••



TRUCK PARKING



PARKS



ANPING LINKLAND

WIRE MESH PRODUCT CO., LTD



Weimin East Street, No. 69-70 The Filter Industrial Park of Anping County, HEBEI, CHINA. 053600



Tel: 0086 311 88833097 Mob: 0086 180 3291 2353



WhatsApp: 0086 180 3291 2353 Skype: 0086 180 3291 2353



www.linklanden.com Veronica@linklandfence.com

