

ANPING LINKLAND

WIRE MESH PRODUCT CO., LTD



Double Swing Gate

CATALOG

2020/01



Tel: 0086 311 88833097
Mob: 0086 180 3291 2353



WhatsApp: 0086 180 3291 2353
Skype: 0086 180 3291 2353



www.linkland.com
Veronica@linklandfence.com



Fence Gates / *Double Swing Gate*

Double swing gate is a popular choice when enough space is available for entry purpose.

Its double leaf design allows its opening angle up to 180° while its standard widths up to 10 m and heights up to 3 m ensure pedestrians and vehicles can pass through the fence easily.

Generally, it is attached to round or square post and then connected with adjustable hinges.

Besides, it can work with either manual or automation system to secure your property from unauthorized access.

We have a variety of double swing gates for chain link fence, curvy welded fence, 358 high security fence, steel fence, palisade fencing and Australia temporary fence for you to choose from.





⊕ **Chain link fence double swing gate** / Match with chain link fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m
Mesh Size	50 × 50 mm, 60 × 60 mm, 80 × 80 mm
Wire Diameter	3.0–6.0 mm
Post (round)	48 mm OD, 60 mm OD
Frame Tube	32 mm OD, 38 mm OD, etc.

⊕ **Curvy welded fence double swing gate** / Match with curvy welded fence




Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m
Mesh Size	50 × 100 mm, 50 × 200 mm, 75 × 150 mm
Wire Diameter	3.0–6.0 mm
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm
Frame Tube	20× 20 mm, 25× 25 mm, 30 × 30 mm
Surface Treatment	Hot dipped galvanized, powder coating

⊕ **358 high security fence double swing gate** / Match with 358 high security fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m
Mesh Size	76.2 × 12.7 mm (3" × 0.5")
Wire Diameter	3.2 mm, 4.0 mm
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm
Frame Tube	20× 20 mm, 25× 25 mm, 30 × 30 mm
Surface Treatment	Hot dipped galvanized, powder coating

⊕ **Steel fence double swing gate** / Match with steel fence

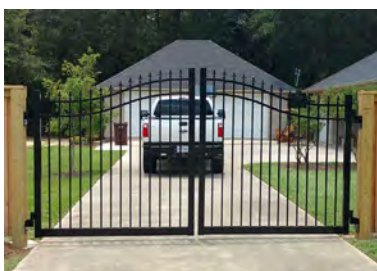

Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m
Vertical Tube Space	100 mm, 120 mm, 150 mm, 170 mm
Tube Size	15 × 15 mm, 19 × 19 mm, 30 × 30 mm, 40 × 40 mm
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm
Surface Treatment	Hot dipped galvanized, powder coating



⊕ **Palisade fence double swing gate** / Match with palisade fencing



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m
Angle Steel	40 × 40 mm, 50 × 50 mm
Pale Size (W/D)	62 mm, 65 mm, 70 mm
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm
Surface Treatment	Hot dipped galvanized, powder coating

⊕ **Australia temporary fence double swing gate** / Match with Australia temporary fence



Height	2.1 m
Width	5.0 m
Mesh Size	50 mm × 100 mm, 50 mm × 150 mm, 75 mm × 100 mm, 75 mm × 150 mm
Wire Diameter	3.0 mm, 3.5 mm, 3.8 mm, 4.0 mm, 5.0 mm
Frame Tube	32 mm OD, 38 mm OD, etc.
Surface Treatment	Hot dipped galvanized



LINKLAND™

ANPING LINKLAND

WIRE MESH PRODUCT CO., LTD



Weimin East Street, No. 69-70
The Filter Industrial Park of Anping
County, HEBEI, CHINA. 053600



Tel: 0086 311 88833097
Mob: 0086 180 3291 2353



WhatsApp: 0086 180 3291 2353
Skype: 0086 180 3291 2353



www.linklanden.com
Veronica@linklandfence.com

