ANPING LINKLAND

WIRE MESH PRODUCT CO., LTD







Tel: 0086 311 88833097 Mob: 0086 180 3291 2353



WhatsApp: 0086 180 3291 2353 Skype: 0086 180 3291 2353



www.linklanden.com Veronica@linklandfence.com

THERE WILL ALWAYS BE A WIRE MESH FENCE PERFECT FOR YOUR FENCING DEMANDS



Founded in 1999, Anping Linkland Wire Mesh Product Co., Ltd is a professional wire mesh fence manufacturer and supplier in China. We enjoy a high reputation in wire mesh fence industry and are highly recognized by customers both at home and abroad.

We specialize in the production and export of all kinds of welded wire fence, temporary fences, fences gates and other security fences. We have nearly 220 sets of production machinery and more than 800 staff members to ensure high production efficiency and output. Besides, we have established various strict QC systems and standard operating procedures. All our products are manufactured in accordance with ISO 9001, BV and SGS International Standards. Only in this way, we can always provide our clients with best products.

Drawings Supply

We supply CAD & PDF drawings about the fence designs, detailed technical data, accessories and installation types.

Cost-Effective Solutions

We focus on developing and supplying reliable and cost-effective fence solutions to meet the exact needs of customers.

International Standards

We obey the industry and international production and products standards and ensure all our tolerances are within the standard requirements.

With all these efforts, we believe we will grow bigger and stronger with all our clients together.

Health Technical Support

We supply installation guidance and technical support for your efficient installation during your projects.

Free Samples & Brochures

We supply free samples for your test and the product brochures will be delivered along with the samples for your reference.

Customization Service

We try our best to supply customization service to satisfy all your special requirements.

Wire Mesh Fences Catalog

About Linkland	P. 02
Production Machinery	P. 04
Quality Control	P. 04
Welded Wire Fence	P. 05
Curvy Welded Fence	P. 05
• 358 High Security Fence	P. 10
Double Wire Fence	P. 16
BRC Fence	P. 21
Temporary Fence	P. 26
Australia Temporary Fence	P. 26
Canada Temporary Fence	P. 31
Temporary Chain Link Fence	P. 36
Crowd Control Barrier	P. 41
Chain Link Fence	P. 46
Palisade Fencing	P. 51
Steel Fence	P. 56
Fence Gate	P. 61
• Single Swing Gate	P. 61
Double Swing Gate	P. 64
• Sliding Gate	P. 67
Corral Panels	P. 69
Our Projects	P. 73

Production Machinery

What We have?			
Wire drawing machine	16*	Wire straightening machine	5*
Pipe cutting machine	20*	Punching machine	6*
Cutting machine	12*	Welding machine	20*
Semi-automatic point welding machine	8*	Weaving machine	130*
Powder coating work line	2*		



Real factory Certification

We are real factory. Our factory has been certificated by the ISO, BV and SGS. All our productions are supervised by these three third party agencies.



Comply with International Standards

All our productions are produced in accordance with international standard, including ISO, ASTM, Australia and other standards. All products tolerances are within the standard requirements.



Skillful Workers Passing Through Induction Training

All our workers are required to pass the Induction training before taking up their posts. They have rich experience and operate machines strict in accordance with standard operating procedures to ensure efficient and smooth production. Besides, they can reduce the production loss and production costs.



Strict QC System

We have strict quality control system to inspect our products before, during and after production. Any defect will be separated and we promise all our products we delivered are qualified.















Curvy Welded Fence

Curvy welded fence, also known as 3D security fence, is a kind of specially designed welded wire mesh with V-shaped bending curves in its longitudinal direction.

It is made of high quality carbon steel wires where wires in the horizontal and vertical direction are welded at their junctions to provide a rigid wire mesh fence.


Generally, the number of V-shaped curves varies as the height of welded wire mesh varies.

Its attractive appearance, rigid structure and excellent visibility make it become a popular security fence that is widely used in railways, airports, schools, factories, residential areas, gardens, parks, sports stadiums, etc.

Surface Treatment



Specification

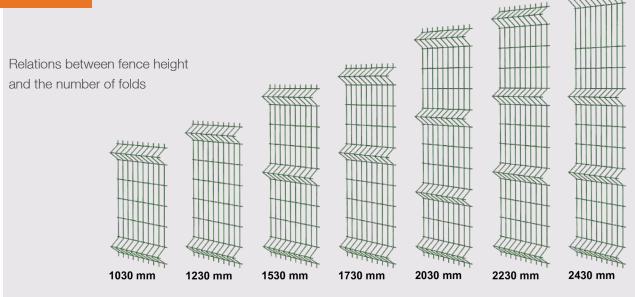

A Height:

630 mm, 830 mm, 1030 mm, 1230 mm, 1430 mm, 1530 mm, 1630 mm, 1730 mm, 1830 mm, 1930 mm, 2030 mm, 2230 mm, 2430 mm

- **B Width:** 2000 mm, 2500 mm, 2900 mm
- Wire Diameter: 3.0 mm, 3.5 mm, 4.0 mm, 4.5 mm, 5.0 mm
- Mesh Opening:

 50×100 mm, 50×150 mm, 50×200 mm, 75×100 mm, etc.

E Clamp:


metal clamp/anti-UV plastic clamp/ no clamp (for peach post)

F Post:

Round post (48 0D \times 1.5/2.0 mm, 60 0D \times 1.5/2.0 mm); square post (50 \times 50 \times 1.5/2.0 mm, 60 \times 60 \times 1.5/2.0 mm, 80 \times 80 \times 1.5/2.0 mm);

 $\begin{aligned} & \text{rectangular post } (40 \times 60 \times 1.5/2.0 \text{ mm}, 40 \times 80 \times 1.5/2.0 \\ & \text{mm}, 60 \times 80 \times 1.5/2.0 \text{ mm}, 80 \times 100 \times 1.5/2.0 \text{ mm}) \end{aligned}$

G Post Cap: metal cap / anti-UV plastic cap

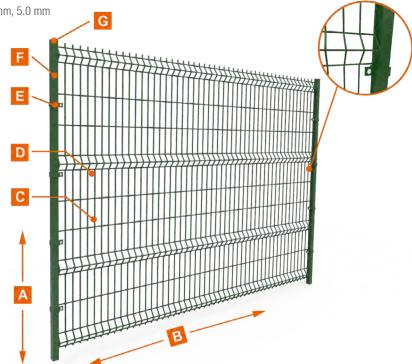

- All colors are available in Ral;
- >Other materials and specifications are available upon request.
- >If the fence height falls between 630 mm and 1430 mm, it will have 2 folds; if the fence height falls between 1530 mm and 1930 mm, it will have 3 folds; if the fence height falls between 2030 and 2430, it will have 4 folds as shown below.



The main components and connection methods of our curvy welded fence are as shown below.


Clamp bar connection



Peach post connection

I post connection









J bolt connection











Optional Accessories







Production Flow Chart

Step 1

Raw materials (carbon steel wires)

Step 2

Raw materials (carbon steel wires)

Step 3

Wire mesh welding

Step 4

Wire mesh bending


Step 5

Wire mesh powder coating

Step 6

Finished curvy welded fence panels (powder coating)



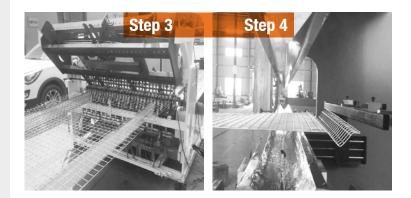



Package & Delivery







POST PACKAGE



FENCE DELIVERY



Features

Beautiful appearance

Its unique bending curves make it have an authentic 3D outlook compared with other fence panels.

Corrosion resistance & weatherproof performance

Its galvanized and powder coating surface give excellent rust & corrosion resistance to withstand various harsh environment conditions.

Application



OFFICE BUILDINGS



RESIDENTIAL COMMUNITIES

Ridge structure

Its bending curves not only offer a beautiful surface but also strengthen its rigidity.

Long service life

The galvanized and powder coating treatment allows the curvy welded fence working properly for 10 years.



KINDERGARTENS



FACTORY YARDS

Cost effective

It provides a competitive price while maintaining high quality, rigidity and long life service.

Less maintenance

It has a solid structure, so it will not damage easily. Besides, its excellent corrosion resistance and weatherproof performances keep it work properly under harsh environments and extend its maintenance period.

•••••



TRUCK PARKING



PARKS



358 High Security Fence

358 high security fence, also known as anti-climb fence, is a kind of superior high tensile and high security welded wire mesh fence. The fence name 358 comes from its panel with a mesh opening of $3" \times 0.5"$ and a wire diameter of 8-gauge (approximate to $76.2 \text{ mm} \times 12.7 \text{ mm} \times 4 \text{ mm}$). It is deigned to be a robust, anti-climb and anti-cut barrier to provide high security protection. The mesh opening is so small, you can even put your finger on it, which makes it is almost impossible to be climbed and cut. Meanwhile, the 8-gauge wire is strong enough to form a rigid structure, which make it is extremely perfect to secure your property and realize effective access control. It is hugely flexible for a wide range of high security locations, including but not limited to, schools, industrial and commercial sites, police stations, prisons, government agencies, airports, railways and seaports, etc.





Panel Surface

According to the shape of panel surface, our 358 high security fences can be divided into two types as shown below.





Surface Treatment

According to the surface treatment, our 358 high security fence can be divided into two types as shown below.





Mesh Opening Direction

According to the mesh opening direction, our high security fence can be divided into two types as shown below.



HORIZONTAL MESH OPENING



VERTICAL MESH OPENING



A Height: 1200–2500 mm

B Width: 2000–3100 mm

Wire Diameter: 3.2 mm (10 gauge), 4.0 mm (8 gauge)


Mesh Opening: 12.7 × 76.2 mm (0.5" × 3")

E Clamp: metal clamp/tension bar covered


F Post:

square post (60 \times 60 \times 2.0/2.5/3.0 mm, 80 \times 80 \times 2.0/2.5/3.0 mm); rectangular post (40 \times 60 \times 2.0/2.5/3.0 mm, 40 \times 80 \times 2.0/2.5/3.0 mm, 60 \times 80 \times 2.0/2.5/3.0 mm, 80 \times 100 \times 2.0/2.5/3.0 mm)

G Post Cap: metal cap / anti-UV plastic cap

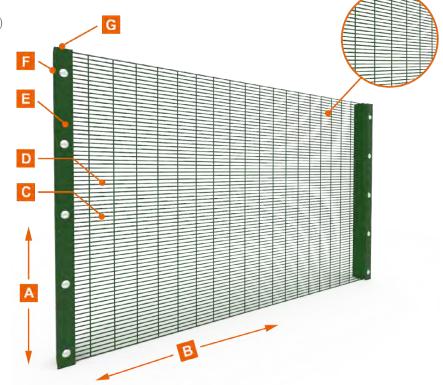

- > 3510 high security fence is also available. 3510 high security fence has the same mesh opening as the 358 high security fence, the only difference is the wire diameter is 10-gauge instead of 8-gauge.
- > All colors are available in Ral;
- > Other materials and specifications are available upon request.

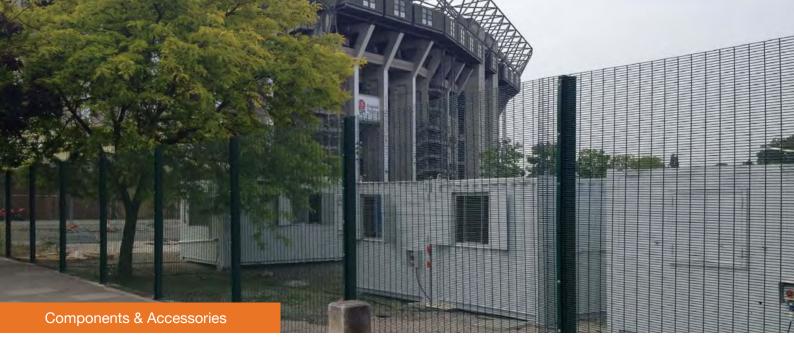


The main components and connection methods of our 358 high security fence are as shown below.

Clamp bar connection



Spider clip connection



Optional Accessories

Barbed Wires & Razor Wires



BARBED WIRES



RAZOR WIRES

Wall Spikes & Warning Signs



WALL SPIKES



WARNING SIGNS



Production Flow Chart

Step 1

Raw materials (galvanized steel wires)

Step 2

Steel wire straightening and cutting

Step 3

Wire mesh welding

Step 4

Wire mesh bending

Step 5


Fence panel powder coating

Step 6

Finished 358 high security fence panels









Package & Delivery



PANEL PACKAGE



POST PACKAGE



FENCE DELIVERY



Features

⊕ Anti-climb

Small mesh opening offers no footholds for climbing.

Excellent surface treatment

Galvanized and powder coating treatments offers excellent rust, corrosion and weather resistance performances.

⊕ Robust structure

Panel wires are firmly welded at every intersection and provide a solid and robust structure.

High security

It can be cooperated with barbed wires and razor wires to offer higher security.

⊕ Anti–cut

Solid welding joints, small mesh opening, together with thick wire diameter make the mesh is hard to be cut by hand or powered tools.

Application

Our 358 high security fence is hugely flexible for a wide range of high security locations, including but not limited to, schools, industrial and commercial sites, police stations, prisons, government agencies, airports, railways and seaports, etc.



COMMUNITIES



CONSTRUCTION SITES



FACTORIES



GOVERNMENT AGENCIES



ALONG ROADSIDE



SCHOOLS



Double Wire Fence

Double wire fence, also known as twin wire fence, is a kind of specially designed welded wire fence with double horizontal wires welded to single vertical wire. Its unique structure makes it stronger and more durable than single wire fence. Our double wire fence is made of high quality carbon steel wires with a diameter of 6/5/6 mm or 8/6/8 mm. Typically, our double wire fence cannot come with folds because of its vertical wire is too strong for bending. Besides, galvanized or powder coating treatment gives the double wire fence excellent corrosion and rust resistance performance and a long service life. Double wire fence is very popular in European markets and is widely used in various residential, commercial and industrial applications, including but not limited to, playgrounds, schools, communities, gardens, parks, etc.

Surface Treatment

According to its surface treatment, our double wire fence can be divided into two types as shown below.

Galvanized





Top Edge

According to the shape of its top edges, our double wire fence can be divided into two types as shown below.

Flat top



Arch top






- A Height: 630 mm, 830 mm, 1030 mm, 1230 mm, 1430 mm, 1530 mm, 1630 mm, 1730 mm, 1830 mm, 1930 mm, 2030 mm, 2230 mm, 2430 mm
- **B Width:** 2000 mm, 2500 mm, 3000 mm
- Wire Diameter: 6/5/6 mm, 8/6/8 mm
- **Mesh Opening:** 50 × 100 mm, 50 × 150 mm, 50 × 200 mm, mm, 55 × 200 mm, 75 × 100 mm
- E Clamp: metal clamp
- F Post:

Round post (48 0D \times 1.5/2.0 mm, 60 0D \times 1.5/2.0 mm); square post (50 \times 50 \times 1.5/2.0 mm, 60 \times 60 \times 1.5/2.0 mm, 80 \times 80 \times 1.5/2.0 mm);

rectangular post (40 \times 60 \times 1.5/2.0 mm, 40 \times 80 \times 1.5/2.0 mm, 60 \times 80 \times 1.5/2.0 mm, 80 \times 100 \times 1.5/2.0 mm)

G Post Cap: metal cap / anti-UV plastic cap

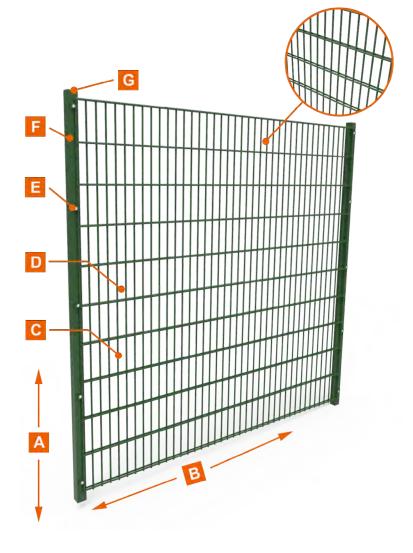

- > All colors are available in Ral;
- > Other materials and specifications are available upon request.



Panel Surface

The main components and connection methods of our double wire fence are as shown below.

Clamp bar connection



Metal clamp connection



J bolt connection



U bolt connection



Square clamp connection



I post connection



Optional Accessories

Wall Spikes & Razor Wires







Production Flow Chart

Step 1

Raw materials (carbon steel wires)

Step 2

Steel wire straightening and cutting

Step 3

Wire mesh welding

Step 4

Wire mesh powder coating

Step 5

Finished double wire fence (powder coating)










Package & Delivery



PANEL PACKAGE



ACCESSORY PACKAGE



FENCE DELIVERY



Features

Various top design patterns

It has both flat top and arch top design patterns for you to choose from.

Excellent surface treatment

Its galvanized or powder coating surface give excellent rust & corrosion resistance to withstand various harsh environment conditions.

Ridge structure

Double horizontal wires are welded firmly to the vertical wire to form a ridge structure.

Long service life

The galvanized and powder coating treatment allows the double wire fence working properly for nearly 10 years.

Competitive price

It provides a competitive price while maintaining high quality, rigidity and a long life service.

Less maintenance

It has double horizontal wires to provide more rigidity and durability, so that it will not damage easily and require less maintenance.

Application



BASKETBALL COURTS



PARKS



PARKING LOTS



GARDENS



RESIDENTIAL COMMUNITIES



ZOO ANIMALS



BRC Fence

BRC fence, also known as roll top fence, is a kind of specially designed welded wire mesh fence with unique top and bottom "rolled" edges.

It is manufactured from high tensile steel wires that are welded together and bent to form a triangular roll top surface at its top and bottom to provide a firm structure and accurate mesh openings.

Its rolled edges not only offer an authentic user-friendly surface, but also give maximum rigidity and excellent visibility.

Currently, it is very popular among Singapore, Japan, South Korea and Southeast Asia regions and is mainly used as security fence or barriers in, including but not limited to, parks, schools, playgrounds, factories, parking lots, residential communities, etc.

Surface Treatment According to the surface treatment, our BRC fence can be divided into two types as shown below.



Galvanized Powder coating



A Height: 900–2400 mm

B Width: 1500–3000 mm

Wire Diameter: 4.0 mm, 4.5 mm, 5.0 mm, 6.0 mm

Mesh Opening: 50 × 150 mm, 50 × 200 mm,

 $50 \times 300 \text{ mm}$


E Clamp: metal clamp/anti-UV plastic clamp

F Post:

Round post (48 0D \times 1.5/2.0 mm, 60 0D \times 1.5/2.0 mm); square post (50 \times 50 \times 1.5/2.0 mm, 60 \times 60 \times 1.5/2.0 mm, 80 \times 80 \times 1.5/2.0 mm);

rectangular post (40 \times 60 \times 1.5/2.0 mm, 40 \times 80 \times 1.5/2.0 mm, 60 \times 80 \times 1.5/2.0 mm, 80 \times 100 \times 1.5/2.0 mm)

G Post Cap: metal cap / anti-UV plastic cap

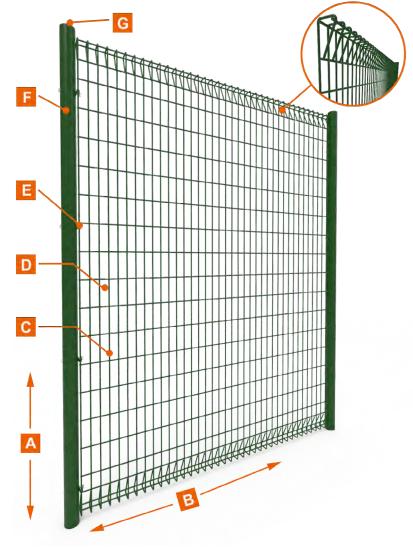

- > All colors are available in Ral;
- > Other materials and specifications are available upon request.



The main components and connection methods of our BRC fence are as shown below.

Square post connection



Round post connection



Optional Accessories

Barbed Wires & Razor Wires



BARBED WIRES



RAZOR WIRES



Production Flow Chart

powder coating / galvanized

Step 1

Raw materials (carbon steel wires)

Step 2

Steel wire straightening and cutting

Step 3

Wire mesh welding

Step 4

Wire mesh bending

Step 5

51: Wire mesh powder coating

5²: Wire mesh galvanizing

Step 6

6¹: Finished BRC fence panels (powder coating)

6²: Finished BRC fence panels (galvanized)

















Package & Delivery



PANEL & POST PACKAGE



FENCE DELIVERY



Features

→ Roll top edges

Roll top edges provides both beautiful appearance and rigid structure.

All colors are available

All colors are available in Ral to adapt to most environments.

Solid welding joints

Welded joints ensure the firm structure and long service life.

Long service life

Less maintenance and long service life.

Visibility & security

The mesh opening of the BRC fence panels provides excellent visibility and security.

Corrosion & rust resistant, weatherproof

High quality raw materials and galvanized and powder coating treatment ensure our BRC fence has excellent corrosion and rust resistance performance and great weatherproof performance.

Application



HOUSE GARDENS



RESIDENTIAL COMMUNITIES



LEISURE PARKS



BRIDGES



PARKING LOTS



GAS STATIONS



Australia Temporary Fence

Australia temporary fence is a kind of temporary fence manufactured in accordance with Australian Standard AS 4687-2007 Temporary Fencing and Hoardings and is designed to withstand harsh Australian climates.


It is constructed by galvanized welded wire mesh and round tubes, which provides a smooth surface with excellent rust & corrosion resistance performance and a rigid structure that works well for years.

Australia temporary fence is an ideal choice for preventing unauthorized access and is widely used in infrastructure, civil, industrial, commercial & demolition sites, construction sites, accident spots and a wide range of major public events.





- A Height: 1800 mm, 2100 mm, etc.
- **B Width:** 2100 mm, 2400 mm, 2900 mm, etc.
- **Wire Diameter:** 2.5 mm, 3.0 mm, 3.5 mm, 3.8 mm, 4.0 mm, 5.0 mm
- D Mesh Opening: 50 mm × 100 mm, 50 mm × 150 mm, 75 mm × 100 mm, 75 mm × 150 mm
- Frame: Round pipe (outside diameter 32 mm, 38 mm, 40 mm, 42 mm, 48 mm)
- F Clamp: metal clamp
- **G Feet:** 580 mm x 245 mm x 130 mm, 600 mm x 220 mm x 150 mm

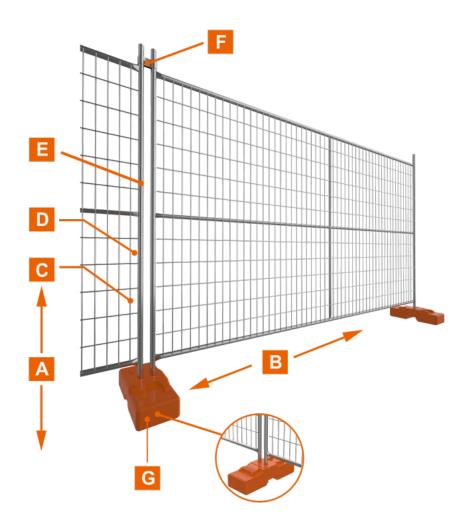

> hot dipped galvanized before welding or hot dipped galvanized after welding



The main component of Australia temporary fence is welded fence panels, panel clamps and plastic feet as shown below.

Fence Panels

Fence panels



Fence panel installation



Plastic Feet

Plastic feet



Plastic feet installation



Panel Clamps

⊕ Fence clamps



⊕ Fence clamp installation



Optional Accessories

Braces & Shade Cloth

Braces



Shade cloth



Handrails & Dog Bars

Handrails



Dog bars



Razor Wires & Warning Signs

Razor wires



Warning signs





Production Flow Chart

Step 1

Raw materials (galvanized steel wires)

Step 2

Raw materials (galvanized steel pipes)

Step 3

Steel wire straightening and cutting

Step 4

Wire mesh welding

Step 5

Pipe cutting

Step 6

Fence frame welding

Step 7

Temporary fence panel welding

Step 8

Temporary fence panel polishing

Step 9

Temporary fence panel spraying

Step 10

Finished Australia temporary fence panels





















Package & Delivery



FENCE PANEL PACKAGE



PLASTIC FEET PACKAGE



FENCE DELIVERY



Features

Smooth and elegant appearance

The surface is well treated to eliminate all burrs for safe installation and removal.

Solid and strong base support

The concrete inside the plastic feet provide a solid and strong base support for the temporary fence.

Full hand welding technology

This full welding technology provides a strong structure to extend its service life and prevent breakage.

Heary installation and removal

All assemble and disassemble work can be done by one single person without digging holes, which saves both time and labor.

Excellent applicability

It can be placed on a variety of grounds including soil, sand, asphalt and concrete surfaces.

Great cost effective

It can be installed and removed for many times and for different uses.

Application

Australia temporary fence is widely used in infrastructure, civil, industrial, commercial & demolition sites, construction sites, accident spots and a wide range of major public events.



GARDENS



ROADSIDE



BASKETBALL COURT



PARKS



CONSTRUCTION SITES



INDUSTRIAL SITES



Canada Temporary Fence


Canada temporary fence is a kind of temporary fence prevailing in Canada and North America markets.

It is constructed by welded wire mesh and square pipes. Platy fence base is also provided to make the temporary fence stand firmly on the ground.

It is designed to be strong and durable and is widely used in infrastructure, civil, industrial, commercial & demolition sites, construction sites, accident scenes and a wide range of major public events for storage, public safety, crowd control or theft deterrence.





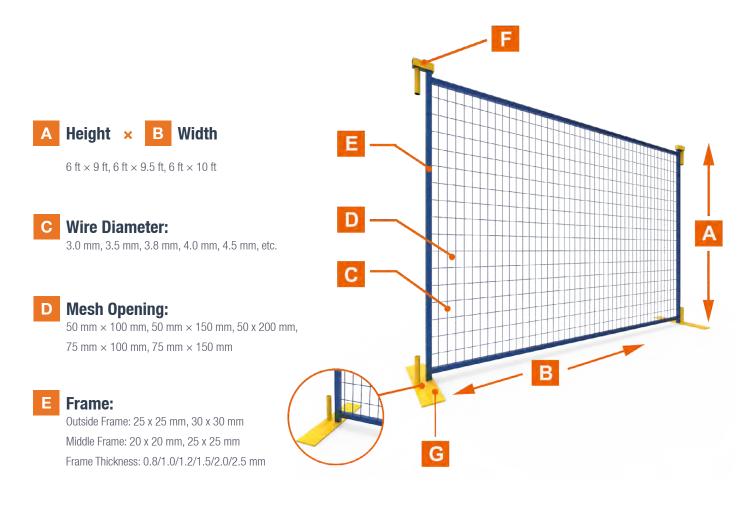

- F Clamp: metal clamp
- **G Base:** 563 mm x 89 mm x 7 mm, 863 mm x 89 mm x 8 mm, etc.
- > Galvanized and powder coated treatment;
- > All colors are available in Ral;
- > Other specifications are available upon request.



The main component of Canada temporary fence is welded fence panels, top clip and fence base as shown below.

Fence Panels, Fence Bases & Top Clips

Fence panels



Fence bases



Top clips



Optional Accessories

Shade cloth



Canada temporary fence with shade cloth





Production Flow Chart

Step 1

Raw materials (galvanized steel wires)

Step 2

Raw materials (galvanized steel pipes)

Step 3

Steel wire straightening and cutting

Step 4

Wire mesh welding

Step 5

Pipe cutting

Step 6

Welded wire mesh frame welding

Step 7

Temporary fence panel welding

Step 8

Fence panel powder coating

Step 9

Finished Canada temporary fence panels



















Package & Delivery



FENCE PANEL PACKAGE



FENCE DELIVERY



Features

Smooth and elegant appearance

The surface is well treated to eliminate all burrs for safe installation and removal.

Great cost effective

It can be installed and removed for many times and for multiple uses.

Solid and stable base support

Platy fence feet are provided to make the temporary fence stand firmly on the ground.

Lightweight and moveable with detachable base

Its lightweight and detachable base make it easy to handle and transport.

Easy installation and removal

All assembly and disassembly works can be done by one single person without digging holes, which saves both time and labor.

A wide range of colors

All colors are available to meet your specific needs.

Application

Canada temporary fence is designed to provide temporary boundary for various applications and is widely used in infrastructure, civil, industrial, commercial & demolition sites, construction sites, accident spots and a wide range of major public events for storage, public safety, crowd control or theft deterrence.



AMUSEMENT PARKS



CONSTRUCTION SITES



STORAGE



TREE PROTECTION



PARKING LOTS



INDUSTRIAL SITES



Temporary Chain Link Fence

Temporary chain link fence, also known as portable chain link fence or chain link construction fence, is a kind of free-standing chain link fence with movable feet.

It can be installed directly in a variety of grounds including sand, soil, asphalt and concrete without digging holes or removing excavated materials, which saves both time and labor.


It is widely used to protect your property and prevent unauthorized persons from entering.

Typically, temporary chain link fence is commonly seen in construction sites, residential sites, schools, major public events including sports, concerts, gatherings, swimming pools and traffic & crowd controls.





- A Height: 1800 mm, 2400 mm
- **Width:** 2400 mm, 3000 mm, 3700 mm, 4300 mm
- Wire Diameter:
 2.5 mm, 3.0 mm, 3.5 mm, 3.8 mm,
 4.0 mm, 5.0 mm
- Mesh Opening: 50 mm × 50 mm, 57 mm × 57 mm, 60 mm × 60 mm, 70 mm × 70 mm
- E Clamp: metal clamp
- Frame: Round pipe
 (outside diameter 32 mm, 38 mm, 40 mm)
- **G Base:** 915 mm × 350 mm × 200 mm, 760 mm × 460 mm × 200 mm

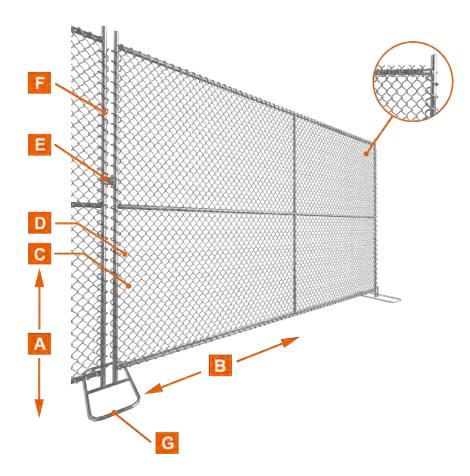

> Other materials and specifications are available upon request.



Fence Panel

The chain link fence fabric may be attached to the fence frame and fixed with tension bars or tie wires.

Fence panel assembled with tie wires



Fence panel assembled with tension bars



Optional Accessories

Sand bags generally work together with fence feet to increase the stability of the temporary chain link fence.



TEMPORARY CHAIN LINK FENCE WITH SAND BAGS

Fence Bases

We have square, oval and flat fence bases for you to choose from as shown below

Square fence base











Panel Clamps

Panel clamps are used to connect sections of framed chain link fence panels together.

Panel clamps







While shade cloth is also a common choice for temporary chain link fence when it is used in construction sites to prevent dust blowing.



TEMPORARY CHAIN LINK FENCE WITH SHADE CLOTH



Production Flow Chart

Step 1

Raw materials (galvanized steel wire coils)

Step 2

Raw materials (galvanized steel pipes)

Step 3

Galvanized chain link fence fabric weaving

.....

Step 4

Pipe cutting

Step 5

Fence frame welding

Step 6

Chain link fence and frame assembly

Step 7

Finished temporary chain link fence

Step 8

Temporary chain link fence storage

















Package & Delivery



FENCE PANELS AND ACCESSORIES PACKAGE



FENCE DELIVERY



Features

No digging or debris cleaning

It can be inserted into the moveable feet directly without digging holes or cleaning excavated debris.

Adaptability

It can be placed on various surfaces including sand, soil, asphalt and concrete.

Easy installation and removal

It can be installed and removed easily and be stored in the warehouse for repeat uses.

Affordability

Its relatively inexpensive price is really a budge-friendly choice for all users.

Security

It can create an enclosure to prevent pedestrians from construction sites or other dangerous places and keep them safe from accidental injury.

Durability

High quality raw materials ensure its great corrosion, rust and weather resistance performances.

Application

Temporary chain link fence is widely used in construction sites, residential sites, schools, major public events including sports, concerts, gatherings, swimming pools and traffic & crowd controls.



SHOPPING MALL



RESTRICTED AREA



TEMPORARY PARKING



ROAD CONSTRUCTION



PARKING LOTS



DEMOLITION SITES



Crowd Control Barrier

Crowd control barrier, also known as pedestrian barrier or crowd control barricade, is a perfect choice for guiding and restricting crowd and traffic flows to keep people and vehicles from entering restricted areas.


It is constructed of superior steel pipes and is hand welded for high strength. It is also provided with an interlocking design, which makes it can be easily hooked to another and create a long, continuous line of protection.


Crowd control barrier is widely used in construction sites and many public events, including but not limited to, sports events, concerts, parades, political rallies, demonstrations and outdoor festivals.

Surface Treatment

We have both galvanized and powder coating crowd control barriers for your choice. All RAL colors are available.

→ Galvanized

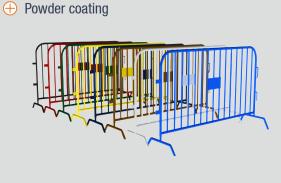

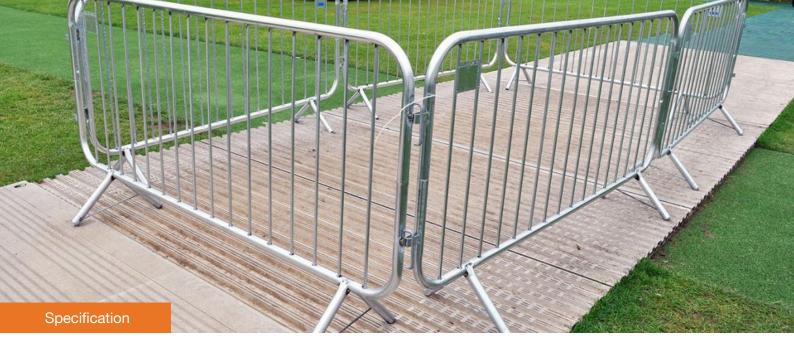

A Height: 1.1 m, 1.25 m, 1.5 m

B Width: 2.0 m, 2.1 m, 2.2 m, 2.4 m, 2.5 m


Frame: 32 × 1.2/1.5/2.0 mm, 38 × 1.2/1.5/2.0 mm, 42 × 1.2/1.5/2.0 mm, 48 × 1.2/1.5/2.0 mm

Inner pipe: 12 × 0.7 mm, 14 × 1.0 mm, 16 × 1.0 mm, 20 × 1.2 mm, 25 × 1.2 mm

Connection: metal hook

Spacing:60 mm, 100 mm, 120 mm, 150 mm, 200 mm

- > Galvanized and powder coating treatment;
- > All colors are available in Ral;
- > Other specifications are available upon request

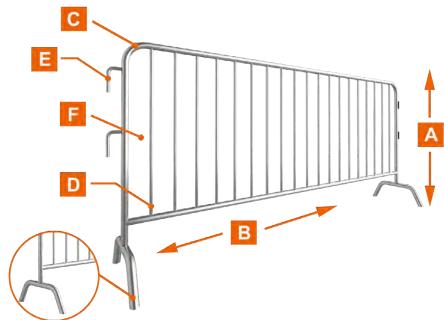



The main components of the crowd control panel are fence panels and bases. We have three kind of bases. Of which, fixed bases are welded to the bottom of the fence panel directly while the flat base and bridge base are bolted to the panel frame. Their specific features are as shown below.

Base Types





Flat base



Bridge base



Optional Accessories



SHADE CLOTH



CUSTOMIZED LOGOS



SIGNBOARDS



Production Flow Chart

Step 1

Raw materials (galvanized steel pipes)

Step 2

Pipe cutting

Step 3

Pipe bending

Step 4

Crowd control barrier panel welding

Step 5

Finished crowd control barrier panels

Step 6

Crowd control barrier panel storage











Package & Delivery



CROWD CONTROL BARRIER PACKAGE



CROWD CONTROL BARRIER DELIVERY



Features

Superior steel pipes

All crowd control barriers are made of superior steel pipes for high strength and a long service life.

Detachable bases

Crowd control barriers are provided with detachable bases, easy to handle and transport.

Full welding design

Full welding design is employed to make the barrier strong and durable.

Interlocking system

It adopts an interlocking system, which makes two panel are connected easily and firmly.

Excellent surface treatment

Galvanized or power coated surface treatment makes it corrosion and rust resistance and work perfectly in harsh environments.

Various base types

A variety of base types are available for you to choose from and are perfect for all ground surfaces.

Application

Crowd control barrier is widely used in construction sites and many public events, including but not limited to, sports events, concerts, parades, political rallies, demonstrations and outdoor festivals.



RAILWAY STATION



PARK ENTRANCE



BUS STATION



ROADS.



CROWD CONTROL



CYCLING RACE



Chain Link Fence

Chain link fence, also known as cyclone fence, hurricane fence or diamond mesh fence, is a type of woven fence usually made of galvanized or PVC coated steel wire.

The wires are woven together to form beautiful diamond patterns. It offers a costeffective solution for residential and commercial applications.

Typically, the shorter heights are commonly selected for residential uses while the taller heights are most often for commercial uses to provide more security.

Besides, it is a great option for road, railway, airport fencing, equipment and facilities protection, pet and small animal raising as well as zoo fencing.

Raw Materials

We have both galvanized and PVC coated chain link fence for your choice. All RAL colors are available.

⊕ Galvanized chain ⊕ PVC coated chain link fence fabric




link fence fabric



Selvages

We have both galvanized and PVC coated chain link fence for your choice. All RAL colors are available.
















	1''	1.5''	2''	2-1/4"	2-3/8''	2-1/2"	2-5/8"	3''	4''
Mesh opening (D)	25 mm	40 mm	50 mm	57 mm	60 mm	65 mm	70 mm	75 mm	100 mm
Wire diameter (C)	18 Ga	18 Ga. – 13 Ga. 16 Ga, – 8 Ga.			14 Ga. –6 Ga.				
Wire diameter (C)	1.2–2	1.2–2.4 mm 1.6–4.2		1.6–4.2 mn	mm		2.0–5.0 mm		
Width (B)	50–100 m (or more)								
Height (A)	0.5–6.0 m								
Round post & rail diameter (F)	32 mm, 42 mm, 48 mm, 60 mm, 76 mm, 89 mm; thickness: 0.8–5.0 mm								

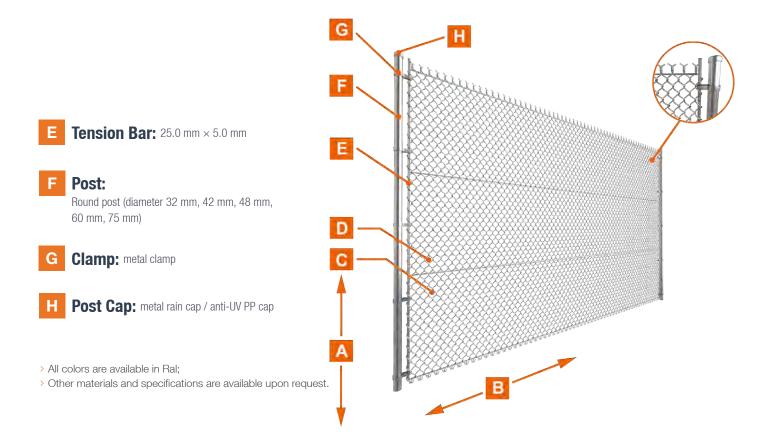



Our chain link components include gates, framework and chain link fabric as shown below. In addition, a variety of accessories are available to help you connect and secure your chain link fence properly and firmly.





CHAIN LINK FENCE WITH BARBED WIRES FOR AIRPORTS



CHAIN LINK FENCE WITH RAZOR WIRES FOR AIRPORTS



Production Flow Chart

Galvanized chain link fence

Step 1

Raw materials (galvanized steel wire)

Step 2

Chain link fabric production (galvanized)

Step 3

Finished chain link fence (galvanized)

PVC coated chain link fence

Step 1

Raw materials (PVC coated steel wire)

Step 2

Chain link fabric production (PVC coated)

Step 3

Finished chain link fence (galvanized)















Features

Security

It can create an enclosure to prevent pets or kids out of the yard and protect their security.

Durability

High quality raw materials ensure its great corrosion, rust and weather resistance performances.

Privacy & visibility

It can protect your privacy while maintaining a certain range of visibility.

Versatility

A variety of specifications and accessories for you to choose from to meet all your demands

Affordability

Its relatively inexpensive price is really a budge-friendly choice for all users.

Less maintenance

Its high strength, solid structure and corrosion and weather resistance performances make it strong enough and require less maintenance.

••••••

Application

It is widely used for residential and commercial applications to create a secure barrier and provide both visibility and security. Besides, it is a great option for road, railway and airport fencing, equipment and facilities protection, pet and small animal raising as well as zoo fencing.



SPORTS FIELD



COMMERCIAL BUILDINGS



GARDENS



FOREST PROTECTION



RESIDENTIAL ENCLOSURE



PLAYGROUND



Palisade Fencing

Palisade fencing is a high security fencing prevailing in Europe, Australia and South Africa markets.

It is designed to be strong, durable and provide excellent protection against climbing and cutting through.

Its imposing appearance, minimal foot holes and robust vertical steel pales ensure its excellent protection against unauthorized access, vandalism and attack.

Besides, it is also a good alternative to high walls.

Typically, it is widely used to address a wide range of perimeter security needs from general purpose to high security purpose and is widely used in various residential, commercial and industrial applications, including but not limited to, highways, airports, docks, schools, sports grounds, leisure facilities, etc.





Fence panel

The chain link fence fabric may be attached to the fence frame and fixed with tension bars or tie wires.

Galvanized




Powder coating



Pales

Our palisade fencing can be divided into three types by pale profile, namely, D-section pales, W-section pales and angle steel pales as listed below.

D-section pales



- a. square top;
- b. triple pointed top;
- c. single pointed top;
- d. round top;
- e. round & notch top

W-section pales




- f. triple pointed top;
- g. single pointed top;
- h. round top;
- i. round & notch top

Angle steel pales




- j. single pointed top;
- k. double pointed top;
- I. triple pointed top;
- m. triple pointed & splayed top;
- n. triple pointed & spikes top

Connection





I POST CONNECTION





SQUARE POST CONNECTION

B Width: 2750 mm

Pale Type: W-profile, D-profile and angle steel

Pale Top: square top, triple pointed top, single pointed top, round top, round & notch top, etc.

E Pale Thickness:

1.5 mm, 2.0 mm, 2.5 mm, 3.0 mm, 3.5 mm

F Horizontal Rail:


angle steel (40 mm \times 40 mm \times 4 mm, 50 mm \times 50 mm \times 5 mm, 50 mm \times 6 mm)

G Post:

square post (60 mm \times 60 mm, 80 mm \times 80 mm, 100×100 mm);

I post $(100 \times 55 \text{ mm})$

H Connection: fish plate (40 mm × 8 mm× 150 mm)

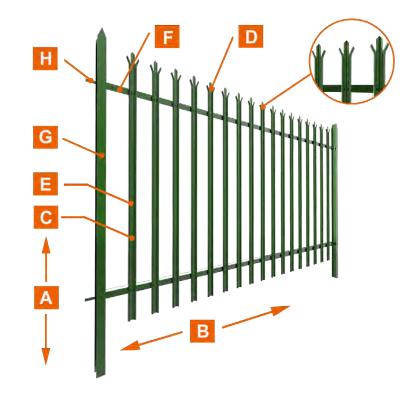

- > All panel pales are provided in 17 pieces;
- > M8 × 30, M12 × 30 anti-vandal steel or stainless steel bolts are provided;
- > All colors are available in Ral;
- > Other materials and specifications are available upon request.

Specification of W–Section Type

•		••				
Panel Size		W-Section Pale: 70 mm		Horizontal Rail	Post	
Height	Width	Pale thickness	Qty: Pale	Angle Steel	Square Post	I Post
1.8 m	2.75 m	2/2.5/3 mm	17 pcs			100 × 55 mm
2.1 m	2.75 m	2/2.5/3 mm	17 pcs	$-40 \times 40 \times 4 \text{ mm},$	60 × 60 mm, 80 × 80 mm, 100 × 100 mm	
2.4 m	2.75 m	2/2.5/3 mm	17 pcs	50× 50 × 6 mm		
3.0 m 2.75 m		2/2.5/3/3.5 mm	17 pcs			
⊕ W–section P	ale: 62 mm					
1.8 m	2.75 m	2/2.5/3 mm	17 pcs		40 × 40 × 4 mm, 50× 50 × 6 mm 60 × 60 mm, 80 × 80 mm, 100 × 100 mm	
2.1 m	2.75 m	2/2.5/3 mm	17 pcs	40 × 40 × 4 mm,		100 × 55 mm
2.4 m	2.75 m	2/2.5/3 mm	17 pcs	50× 50 × 6 mm		
3.0 m	2.75 m	2/2.5/3/3.5 mm	17 pcs			

Specification of D-Section Type

Panel Size		W-Section Pal	W-Section Pale: 70 mm		Post	
Height	Width	Pale thickness	Qty: Pale	Angle Steel	Square Post	I Post
1.8 m	2.75 m	1.5/2/2.5/3 mm	17 pcs			
2.1 m	2.75 m	1.5/2/2.5/3 mm	17 pcs	$40 \times 40 \times 4 \text{ mm}$	60 × 60 mm, 80	100 55
2.4 m	2.75 m	1.5/2/2.5/3 mm	17 pcs	50× 50 × 5 mm	× 80 mm, 100 × 100 mm	100 × 55 mm
3.0 m	2.75 m	1.5/2/2.5/3 mm	17 pcs			



Production Flow Chart

Step 1

Raw materials (galvanized steel coil)

Step 2

Pale profile forming

Step 3

Pale cutting

Step 4

Pale head forming

Step 5

Pale punching

Step 6

Finished pale













Package & Delivery



FENCE PALE PACKAGE



HORIZONTAL RAIL PACKAGE



FENCE DELIVERY



Features

Excellent resistance to deformation

☐ High tensile fixings and support base offer maximum resistance to deformation.

→ Match up with most surroundings

A wide range of designs and colors are available to perfectly match up with most surroundings.

⊕ Corrosion & rust resistance

Excellent corrosion & rust resistance and weather resistance performance.

⊕ Fast & easy installation

Fast and easy installation and less maintenance.

Against unauthorized access, vandalism and attack

Providing a higher level of security and excellent protection against unauthorized access, vandalism and attack.

Application

Palisade fencing is designed to provide a high level of security for a wide range of outdoor applications and is widely used in schools, commercial buildings, parks, churches, stadiums, railways, yards, companies, etc.



COMMUNITIES



GARDENS



PARKS



RAILWAYS



PARKING LOTS



HIGHWAYS



Steel Fence

Steel Fence, also known as tubular steel fence, is a kind of ornamental fence with simple tubular structure yet high defense effect.


It is made of galvanized steel tubes or aluminum tubes by using vertical steel pales and horizontal rails to form the fence.

It has excellent corrosion & rust resistance performance and enjoys a long service life. Its high strength makes it an excellent choice for all security purposes while its powder coating surface makes it adapt to most surroundings.

Our steel fence is widely used in various commercial, residential and industrial applications, including but not limited to, villas, community gardens, schools, factories and other flower beds, lawns, sports stadiums, convention centers, squares, roads, balconies, etc.

Top Pattern

According to their top patterns, our steel fence can be divided into four types as shown below.

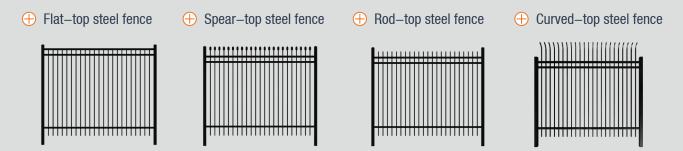



- A Height: 1200 mm, 1500 mm, 1800 mm, 2100 mm
- **B Width:** 1800 mm, 2000 mm, 2400 mm
- C Vertical Picket: 15 mm × 15 mm, 19 mm × 19 mm, 25 mm × 25 mm; thickness: 0.8–2.0 mm
- Horizontal Rail: 30 mm × 30 mm, 40 mm × 40 mm, 45 mm × 45 mm, 2 rails, 3 rails or 4 rails
- Vertical Pipe Spacing: 100 mm, 110 mm, 120 mm
- F Post:

 50 mm × 50 mm, 60 mm × 60 mm,
 80 mm × 80 mm, 100 mm × 100 mm;
 thickness: 1.2–3.0 mm
- G Fixing: Steel brackets or aluminum brackets
- H Post Cap: metal rain cap / anti-UV PP cap




- > Popular color is black, all RAL color can be customized;
- > Double coating service is available, which provides a service life of lasting for 10 years.



The main components of our steel fence are steel fence panels and posts as shown below.

Fence panel



Square posts



Optional Accessories







POST CAPS



RAILING BRACKETS

RAILING BRACKETS



LINE BRACKETS



linklanden.com



Production Flow Chart

Step 1

Raw materials (galvanized steel pipes)

Step 2

Pipe cutting

Step 3

Pipe punching

Step 4

Steel fence panel welding

Step 5

Steel fence panel powder coating

Step 6

Finished steel fence panels













Package & Delivery



FENCE PANEL PACKAGE



FENCE DELIVERY



Features

H Easy & simple installation

Pre-punched mounting holes for easy and simple Installation.

Less maintenance

The simple yet solid structure makes it virtually maintenance free.

Corrosion & rust resistance

The galvanized and aluminum tubes provide excellent corrosion and rest resistance and weather resistance performance.

......

Excellent surface treatment

Galvanized and power coating services extend its service life and keep it working well for years

Adapt to most surroundings

A variety of top pattern, heights and colors are available to adapt to most surroundings.

••••••

Application

Steel fence is widely used in various commercial, residential and industrial applications, including but not limited to, villas, community gardens, schools, factories and other flower beds, lawns, sports stadiums, convention centers, squares, roads, balconies, etc.



BOTANICAL GARDENS



FACTORIES



INDUSTRIAL PARKS



LEISURE PARKS



VILLA YARDS



RECREATION FACILITIES



Fence Gates / Single Swing Gate

Single swing gate is generally used for pedestrian entry purpose; therefore, it is also known as pedestrian gate.

It is an integral part of the whole fencing system.

It offers a convenient entrance for authorized pedestrians and works with various fence panels, post and accessories to secure your properties.

We have a variety of single swing gates for chain link fence, curvy welded fence, 358 high security fence, steel fence, palisade fencing, Australia temporary fence, Canada temporary fence and crowd control barrier for you to choose from.





⊕ Chain link fence single swing gate / Match with chain link fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m	
Width	0.8 m, 1.0 m, 1.2 m, 1.5 m, 2.0 m	
Mesh Size	50 × 50 mm, 60 × 60 mm, 70 × 70 mm	
Wire Diameter	3.0–5.0 mm	
Post (round)	48 mm OD, 60 mm OD	
Frame Tube	32 mm OD, 38 mm OD, etc.	

Curvy welded fence single swing gate / Match with curvy welded fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	0.8 m, 1.0 m, 1.2 m, 1.5 m, 2.0 m
Mesh Size	50 × 100 mm, 50 × 200 mm, 75 × 150 mm
Wire Diameter	3.0–5.0 mm
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm
Frame Tube	20× 20 mm, 25× 25 mm, 30 × 30 mm
Surface Treatment	Hot dipped galvanized, powder coating

① 358 high security fence single swing gate / Match with 358 high security fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m	
Width	0.8 m, 1.0 m, 1.2 m, 1.5 m, 2.0 m	
Mesh Size	76.2 × 12.7 mm (3" × 0.5")	
Wire Diameter	3.2 mm, 4.0 mm	
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm	
Frame Tube	25× 25 mm, 30 × 30 mm	
Surface Treatment	Hot dipped galvanized, powder coating	

① Steel fence single swing gate / Match with steel fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	0.8 m, 1.0 m, 1.2 m, 1.5 m, 2.0 m
Vertical Tube Space	100 mm, 120 mm, 150 mm, 170 mm
Tube Size	15 × 15 mm, 19 × 19 mm, 30 × 30 mm, 40 × 40 mm
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm
Surface Treatment	Hot dipped galvanized, powder coating



+ Palisade fencing single swing gate / Match with palisade fencing




Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m	
Width	Vidth 0.8 m, 1.0 m, 1.2 m, 1.5 m, 2.0 m	
Angle Steel	40 × 40 mm, 50 × 50 mm	
Pale Size (W/D)	62 mm, 65 mm, 70 mm	
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm	
Surface Treatment	Hot dipped galvanized, powder coating	

→ Australia temporary fence single swing gate / Match with Australia temporary fence



Height	2.1 m	
Width	1.0–1.3 m	
Mesh Size	50 mm × 100 mm, 50 mm × 150 mm, 75 mm × 100 mm, 75 mm × 150 mm	
Wire Diameter	3.0 mm, 3.5 mm, 3.8 mm, 4.0 mm, 5.0 mm	
Frame Tube	32 mm OD, 38 mm OD, etc.	
Surface Treatment	Hot dipped galvanized	

① Canada temporary fence single swing gate / Match with Canada temporary fence



Height	1.8 m	
Width	1.0–1.3 m	
Mesh Size	50 mm × 100 mm, 50 mm × 150 mm, 75 mm × 100 mm, 75 mm × 150 mm	
Wire Diameter	3.0 mm, 3.5 mm, 3.8 mm, 4.0 mm, etc.	
Frame Tube	25× 25 mm, 30 × 30 mm	
Surface Treatment	Powder coating	

Crowd control barrier single swing gate / Match with crowd control barrier



Height	3.0 m
Width	1.3 m
Frame Tube	40 mm OD
Surface Treatment	Hot dipped galvanized, powder coating



Fence Gates / Double Swing Gate

Double swing gate is a popular choice when enough space is available for entry purpose.

Its double leaf design allows its opening angle up to 180° while its standard widths up to 10 m and heights up to 3 m ensure pedestrians and vehicles can pass through the fence easily.

Generally, it is attached to round or square post and then connected with adjustable hinges.

Besides, it can work with either manual or automation system to secure your property from unauthorized access.

We have a variety of double swing gates for chain link fence, curvy welded fence, 358 high security fence, steel fence, palisade fencing and Australia temporary fence for you to choose from.





+ Chain link fence double swing gate / Match with chain link fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m	
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m	
Mesh Size	50 × 50 mm, 60 × 60 mm, 80 × 80 mm	
Wire Diameter	3.0–6.0 mm	
Post (round)	48 mm OD, 60 mm OD	
Frame Tube	32 mm OD, 38 mm OD, etc.	

Curvy welded fence double swing gate / Match with curvy welded fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m
Mesh Size	50 × 100 mm, 50 × 200 mm, 75 × 150 mm
Wire Diameter	3.0-6.0 mm
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm
Frame Tube	20× 20 mm, 25× 25 mm, 30 × 30 mm
Surface Treatment	Hot dipped galvanized, powder coating

→ 358 high security fence double swing gate / Match with 358 high security fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m	
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m	
Mesh Size	76.2 × 12.7 mm (3" × 0.5")	
Wire Diameter	3.2 mm, 4.0 mm	
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm	
Frame Tube	20× 20 mm, 25× 25 mm, 30 × 30 mm	
Surface Treatment	atment Hot dipped galvanized, powder coating	

Steel fence double swing gate / Match with steel fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m
Vertical Tube Space	100 mm, 120 mm, 150 mm, 170 mm
Tube Size	15 × 15 mm, 19 × 19 mm, 30 × 30 mm, 40 × 40 mm
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm
Surface Treatment	Hot dipped galvanized, powder coating



Palisade fence double swing gate / Match with palisade fencing



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m	
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m	
Angle Steel	40 × 40 mm, 50 × 50 mm	
Pale Size (W/D)	62 mm, 65 mm, 70 mm	
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm	
Surface Treatment	Hot dipped galvanized, powder coating	

igoplus Australia temporary fence double swing gate / Match with Australia temporary fence



Height	2.1 m	
Width	5.0 m	
Mesh Size	50 mm \times 100 mm, 50 mm \times 150 mm, 75 mm \times 100 mm, 75 mm \times 150 mm	
Wire Diameter	3.0 mm, 3.5 mm, 3.8 mm, 4.0 mm, 5.0 mm	
Frame Tube	32 mm OD, 38 mm OD, etc.	
Surface Treatment	Hot dipped galvanized	



Fence Gates / Sliding Gate

Sliding gate is generally used for both vehicle and pedestrian entry purpose. It adopts a ground mounted track for the gate wheel to move on. Besides, its line movement makes it do not require large operating space and is perfect for space limited locations.

Its tracked sliding can also have larger opening widths.

It can work with both manual operating systems and automation systems to allow authorized vehicle & pedestrian access to the fence more easily.

We have a variety of sliding gates for chain link fence, curvy welded fence, 358 high security fence, steel fence and palisade fencing for you to choose from.



Hatch with chain link fence sliding gate / Match with chain link fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m	
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m	
Mesh Size	50 × 50 mm, 60 × 60 mm, 70 × 70 mm	
Wire Diameter	3.0–5.0 mm	
Post (round)	48 mm OD, 60 mm OD	
Frame Tube	32 mm OD, 38 mm OD, etc.	

① Curvy welded fence sliding gate / Match with curvy welded fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m	
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m	
Mesh Size	50 × 100 mm, 50 × 200 mm, 75 × 150 mm	
Wire Diameter	3.0–5.0 mm	
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm	
Frame Tube	20× 20 mm, 25× 25 mm, 30 × 30 mm	
Surface Treatment	Hot dipped galvanized, powder coating	

→ 358 high security fence sliding gate / Match with 358 high security fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m	
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m	
Mesh Size	76.2 × 12.7 mm (3" × 0.5")	
Wire Diameter	3.2 mm, 4.0 mm	
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm	
Frame Tube	25× 25 mm, 30 × 30 mm	
Surface Treatment	Hot dipped galvanized, powder coating	

→ Steel fence sliding gate / Match with steel fence



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m	
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m	
Vertical Tube Space	100 mm, 120 mm, 150 mm, 170 mm	
Tube Size	15 × 15 mm, 19 × 19 mm, 30 × 30 mm, 40 × 40 mm	
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm	
Surface Treatment	Hot dipped galvanized, powder coating	

Palisade fencing sliding gate / Match with palisade fencing



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m	
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m	
Angle Steel	40 × 40 mm, 50 × 50 mm	
Pale Size (W/D)	62 mm, 65 mm, 70 mm	
Post (square)	60 × 60 mm, 80 × 80 mm, 100 × 100 mm	
Surface Treatment	ent Hot dipped galvanized, powder coating	



Corral Panels

Corral panel, also known as livestock panel, is a kind of welded steel tube fence for cattle, horse, sheep and other livestock.


Generally, it is made of square, oval or round tubes and have high strength and solid structure.

It can sit directly on the ground for temporary or permanent fencing to keep cattle or sheep safe and free from wild animal attacks.

We have cattle & sheep panels of different heights, lengths and number of rails for you to choose from.

Rail type

According to the rail type, our corral panels can be divided into three types as shown below.

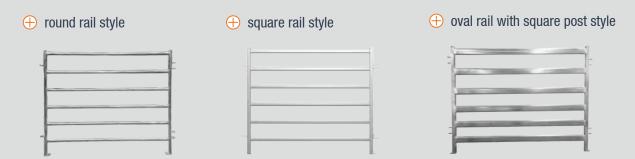

- A Height: 950 mm, 1000 mm, 1800 mm
- **B Width:** 2100 mm, 2900 mm
- C Horizontal Rail: round rail (32 mm OD, 42 mm OD); square rail (40×40 mm, 50×50 mm); oval rail (30×60 mm, 40×80 mm, 42×115 mm, 50×70 mm)
- **Vertical Pipe:** round pipe (32 mm OD, 42 mm OD); square pipe (40 × 40 mm, 50 × 50 mm)
- E U lug F L lug



Specification of Cattle Panels

4	Height × Length	1.8 m × 2.1 m, etc.
₹ A	Horizontal rails	32 mm OD, 42 mm OD (6 round rails), etc.
Round Rail Style	Vertical pipe	32 mm OD, 42 mm OD, etc.
	Thickness	1.6 mm, 2.0 mm, etc.
pur	Material	Pre hot dipped galvanized steel pipe
Rou	Accessories	4 lugs, 2 rain caps are welded on panels. 2 pins are included in one panel.
4)	Height × Length	1.8 m × 2.1 m, etc.
ξ	Horizontal rails	40×40 mm, 50×50 mm (6 square rails), etc.
S	Vertical pipe	40×40 mm, 50×50 mm, etc.
Ba	Thickness	1.6 mm, 2.0 mm, etc.
are	Material	Pre hot dipped galvanized steel pipe
Square Rail Style	Accessories	2 U lugs, 2 L lugs, 2 rain caps and 2 bases are welded on panels. 2 pins are included in one panel.
စ	Height × Length	1.8 m × 2.1 m
Squar e	Horizontal rails	30×60 mm, 40×80 mm, 42×115 mm, 50×100 mm (6 oval rails), etc.
₹ 5	Vertical pipe	40×40 mm, 50×50 mm, etc.
Rost Sty	Thickness	1.6 mm, 2.0 mm, etc.
Rail Pog	Material	Pre hot dipped galvanized steel pipe
Oval Rail with Square Post Style	Accessories	2 U lugs, 2 L lugs, 2 rain caps and 2 bases are welded on panels. 2 pins are included in one panel.
Ħ	Height	5 ft, 6 ft, 2.0 m ,etc.
pe	Width	9 ft, 10 ft, 12 ft, etc.
Round tube with bent bottom base	Frame & Rail Round Tube	32 mm, 42 mm, etc.
ube	Thickness	1.6 mm, 2.0 mm, etc.
nd tube bottom	Accessories	Welded parts: U lugs, rain caps, bases, pins
Rour	Surface treatment	Hot dipped galvanized, galvanized + powder coated

> Other materials and specifications are available upon request.

Specification of Sheep Panels

Round Rail Style	Height × Length	0.95 m \times 2.1 m, 1 m \times 2.1 m, 1 m \times 2.9 m, etc.
	Horizontal rails	32 mm OD, 42 mm OD (5 or 6 round rails), etc.
	Vertical pipe	32 mm OD, 42 mm OD, etc.
nd R	Thickness	1.6 mm, 2.0 mm, etc.
Rour	Material	Pre hot dipped galvanized steel pipe
	Accessories	4 lugs, 2 rain caps are welded on panels. 2 pins are included in one panel.
	Height × Length	0.95 m \times 2.1 m, 1 m \times 2.1 m, 1 m \times 2.9 m, etc.
Je	Horizontal rails	40×40 mm, 50×50 mm (5 or 6 square rails), etc.
ii Sty	Vertical pipe	40×40 mm, 50×50 mm, etc.
e Ra	Thickness	1.6 mm, 2.0 mm, etc.
Square Rail Style	Material	Pre hot dipped galvanized steel pipe
Š	Accessories	2 U lugs, 2 L lugs, 2 rain caps and 2 bases are welded on panels. 2 pins are included in one panel.
tyle	Height × Length	0.95 m × 2.1 m, 1 m × 2.1 m, 1 m × 2.9 m, etc.
Post S	Horizontal rails	30×60 mm, 40×80 mm, 42×115 mm, 30×112 mm (5 or 6 oval rails), etc.
Jare	Vertical pipe	40 × 40 mm, 50 × 50 mm, etc.
ı Sqı	Thickness	1.6 mm, 2.0 mm, etc.
wit	Material	Pre hot dipped galvanized steel pipe
Oval Rail with Square Post Style	Accessories	2 U lugs, 2 L lugs, 2 rain caps and 2 bases are welded on panels. 2 pins are included in one panel.
		рапет.

> Other materials and specifications are available upon request.



Production Flow Chart

Step 1

Galvanized steel pipe

Step 2

Pipe cutting

Step 3

Panel welding

Step 4

Panel spraying

Step 5

Surface cleaning

Step 6

Finished corral panels













Package & Delivery



CORRAL PANEL PACKAGE



CORRAL PANEL DELIVERY



Features

Portable

It can be removed easily and can be transported to everywhere you want.

Sturdy

The high quality steel tube offers great strength and creates a sturdy structure without deformation.

Versatile

A variety of specifications for cow, cattle or sheep at different grow stages.

(+) Comfort

It creates enough space allowing animals walk freely and making them feel safe, relaxed and ease.

Convenience

Easy & quick installation and removal.

Durable

High quality raw materials (galvanized steel tube) ensures its great corrosion, rust and weather resistance performances and extends its service life.

Application

Cattle panels & sheep panels are widely used in farms, pastures and other places for temporary or permanent security fence for cattle, sheep, horses and other large animals.



FARM



CATTLE



PASTURE



SHEEP



CATTLE YARD



SHEEP YARD

Our Projects



358 HIGH SECURITY FENCE

Commercial Project Year: 2019

Country: Poland

Quantity: 4 × 40' HQ Container



BRC FENCE

Community Project

Year: 2019

Country: Singapore

Quantity: 5.5 km



DOUBLE WIRE FENCE

Sports Ground Project

Year: 2019

Country: France

Quantity: 2.5 km



CANADA TEMPORARY FENCE

Construction projects

Year: 2019

Country: Canada

Quantity: 1,000 units



AUSTRALIA TEMPORARY FENCE

Road Renewing Project

Year: 2018

Country: New Zealand Quantity: 3 × 40' HQ



CROWD CONTROL BARRIERS

Crowd Control Project

Year: 2019

Country: U.S.

Quantity: 6,000 units



PALISADE FENCE

Railway Protection Project

Year: 2019

Country: South Africa

Quantity: 4.8 km



STEEL FENCE

Residence Projects

Year: 2017

Country: Poland

Quantity: 4 × 40' HQ Container



AIRPORT FENCE

Airport Renew Project

Year: 2018

Country: Singapore

Quantity: 4 × 40' HQ Container



CHAIN LINK FENCE

Industrial Zone Projects

Year: 2018

Country: Saudi Arabia

Quantity: 10 km



WELDED MESH FENCE

Villa Construction Project

Year: 2019

Country: U.S.

Quantity: 6.7 km



358 SECURITY FENCE

Transformer Substation Projects

Year: 2018

Country: Ireland

Quantity: 4.7 km



ANPING LINKLAND

WIRE MESH PRODUCT CO., LTD



Weimin East Street, No. 69-70 The Filter Industrial Park of Anping County, HEBEI, CHINA. 053600



Tel: 0086 311 88833097 Mob: 0086 180 3291 2353



WhatsApp: 0086 180 3291 2353 Skype: 0086 180 3291 2353



www.linklanden.com Veronica@linklandfence.com

